
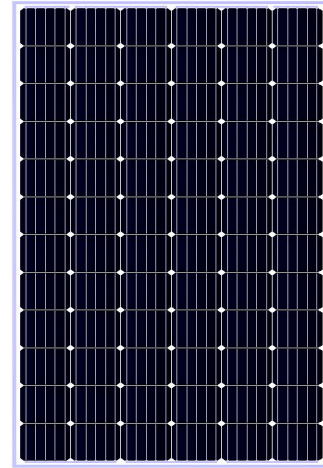


PVT HYBRID 380 Wp / 790 W

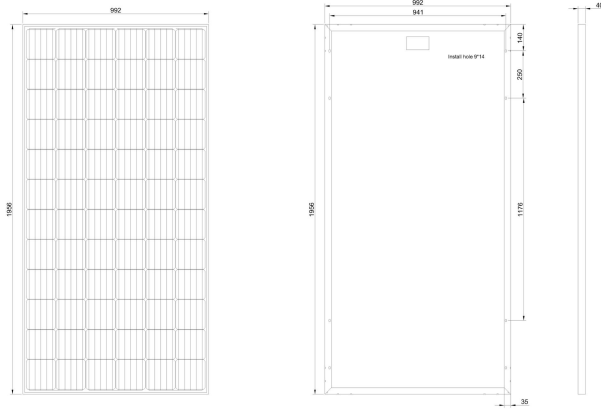

Specifications

* STC: irradiance 1000 W/m ² , AM 1.5, and cell temperature of 25°C	
Model Type.....	360W-36M
Peak Power(Pmax)	360.00
Maximum Power Voltage(Vmp)	38.38
Maximum Power Current(Imp)	9.38
Open Circuit Voltage(Voc)	47.43
Short Circuit Current(Isc)	10.24
Cells Efficiency(%)	20.46
Module Efficiency(%)	18.55
* NOCT: irradiance 800 W/m ² , AM 1.5G, ambient temperature 20°C, wind speed 1 m/s	
Peak Power(Pmax)	267.00
Maximum Power Voltage(Vmp)	35.89
Maximum Power Current(Imp)	7.44
Open Circuit Voltage(Voc)	43.97
Short Circuit Current(Isc)	8.15
Maximum System Voltage(V)	1000
Maximum Series Fuse Rating(A)	15
Power Tolerance	0 ~ +3 %
Pmax Temperature Coefficients(W/°C)	-0.400 %
Voc Temperature Coefficients(V/°C)	-0.290 %
Isc Temperature Coefficients(A/°C)	+0.048 %
NOCT Nominal Operating Cell Temperature(°C)	45±2
Operating and Storage Temperature(°C)	-40 ~ +85

Mechanical characteristics

Cell Type	156.75x156.75 Mono
No. of Cells	72(6x12)
Dimensions	1956x992x40
Weight	20.5kg
Front Glass	3.2mm high transmission, low iron, tempered glass
Frame	Anodized Aluminium Alloy
Junction box	IP65/IP67
Output cables	4mm ² cable 90cm+mc4
MaxWind Load/Snow Load	2400Pa/5400Pa



Packing list

20FT container	12 Packages/ 300pcs
40HQ container	24 Packages/720PCS


Product Standard

Product Performance	IEC61215
Product Safety	IEC61730

IV Cure

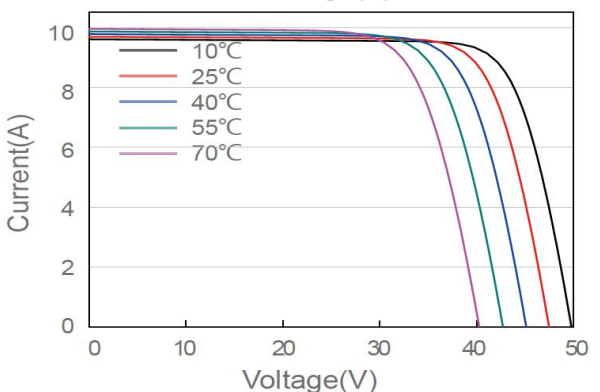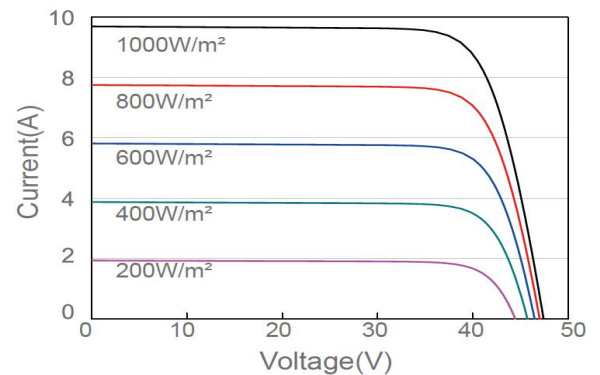

Warranty

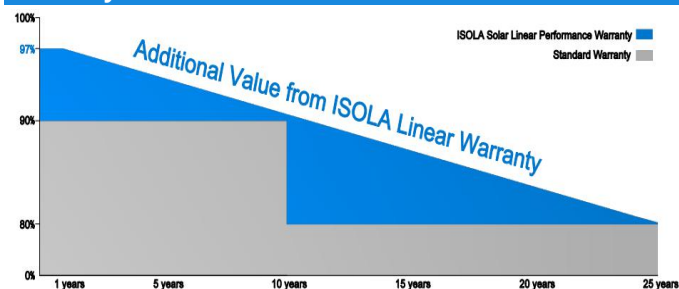

12
YEARS

Guarantee on product material and workmanship

30
YEARS

Linear Power output warranty

